

BACSKIT_B4-6

Manage all stations in the network via RCCMD




- Shutdown
- Messaging

Network Connectivity

- Web Based Configuration Interface
- 10Mbit-100Mbit-1Gbit Networks
- Remote Scripting
- RCCMD Network Messaging
- SNMP V2, V3
- SNMP RFC1628 Network Interface
- Email / EmailTrap
- MODBUS over IP
- BACnet over IP
- Build in SFTP Functions
- Event-, Data and Environmental Log
- RSyslog
- RADIUS
- Network Diagnostic Tools

Facility Management Extension Options

- Pipe-Through RS-232
- MODBUS RS232
- SENSORMANAGER „SENSMC121“
- Temperature Sensor „SM_T_COM“
- Temperature and Humidity Combi Sensor „SM_T_H_COM“
- PROFIBUS „BACS_SPI_II“
- PROFINET „BACS_PROF“
- GSM / LTE / 4G Modem „4G-T61“

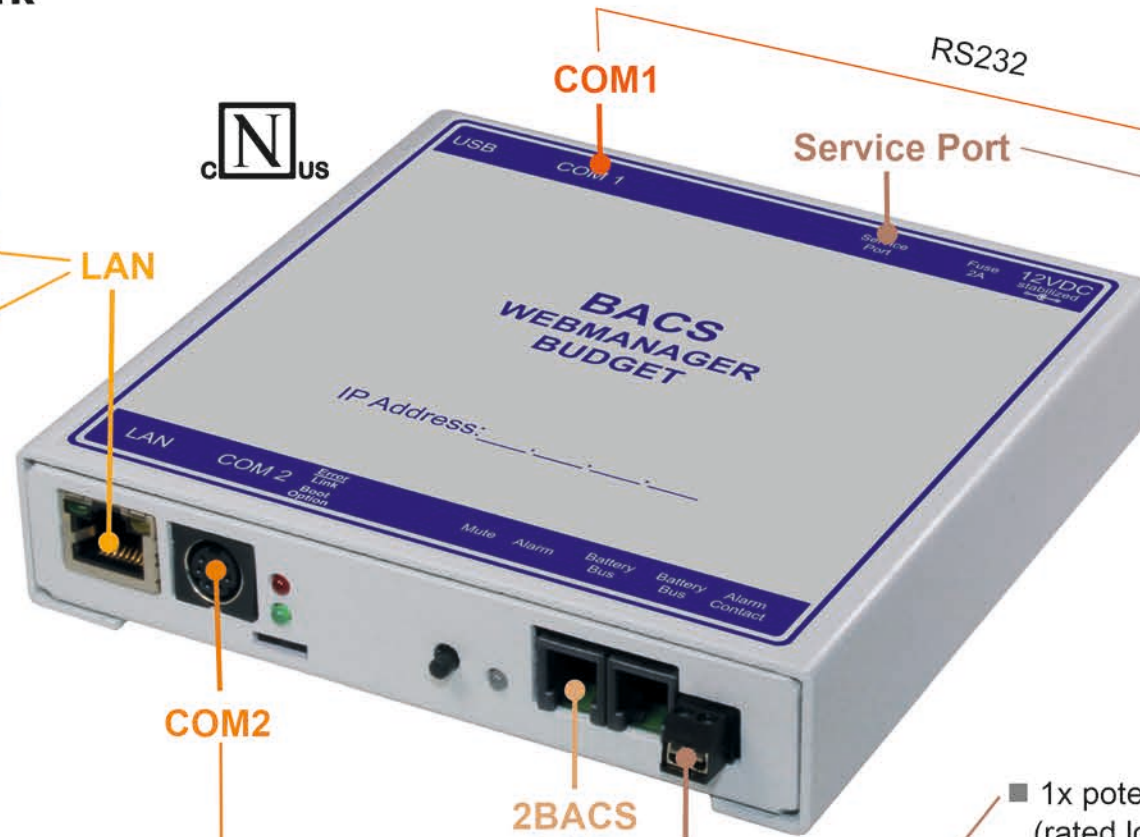

Compatible with different UPS Products, STS/ATS and Power Generators



Connection with WINDOWS

- BACS PROGRAMMER
- BACS READER

- 1x potential-free contact (rated load 24 VDC/1A)

BACS - Battery Management System



- BACS BUS Interface „GX_R_AUX“
- BACS Modules „BACSCxx“
- BACS Current Sensors „BACS_CSHxxx“, „BACS_CSHxxxF“, BACS_CSHxxxFx“