

Manage all stations in the network via RCCMD



Network Connectivity


- Web Based Configuration Interface
- 10Mbit-100Mbit-1Gbit Networks
- Remote Scripting
- RCCMD Network Messaging
- SNMP V2, V3
- SNMP RFC1628 Network Interface
- Email / EmailTrap
- MODBUS over IP
- BACnet over IP
- Build in SFTP Functions
- Event-, Data and Environmental Log
- RSyslog
- RADIUS
- Network Diagnostic Tools

CS141MINI-6

Slot Version



LAN

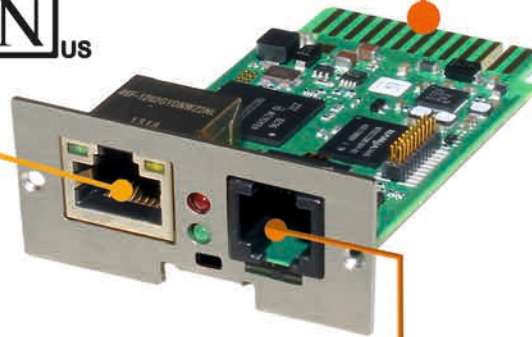

COM1

COM2 - COM3
Combi Port

Depending on connected devices:
Adapter and/or splitter required



„SPSMRJ_1“

Facility Management Extension Options

- Pipe-Through RS-232
- MODBUS RS232
- SENSORMANAGER „SENSMC121“
- Temperature Sensor „SMTCOMMR“
- Temperature and Humidity Combi Sensor „SMTHCOMMR“
- PROFIBUS „SPI_2_MR“
- PROFINET „PROF_MR“
- LONbus „LON_MR“
- GSM / LTE / 4G Modem „4G-T61MR“

RS232

Compatible with different UPS Products, STS/ATS and Power Generators



Setup for dry contact and add-ons

- AS400 Adapter „AS400AUX4“
- Alarm Buzzer „CS141_BUZ“
- Relay Board „CON_R_AUX4“
- Connection Terminal „CON_AUX4“

■ BACS - Battery Management System



- BACS BUS Interface „GX_R_AUX“