

Manage all stations in the network via RCCMD

- Shutdown
- Messaging




Network Connectivity

- Web Based Configuration Interface
- 10Mbit-100Mbit-1Gbit Networks
- Remote Scripting
- RCCMD Network Messaging
- SNMP V2, V3
- SNMP RFC1628 Network Interface
- Email / EmailTrap
- MODBUS over IP
- BACnet over IP
- Build in SFTP Functions
- Event-, Data and Environmental Log
- RSyslog
- RADIUS
- Network Diagnostic Tools

CS141R_2-6

Slot Version

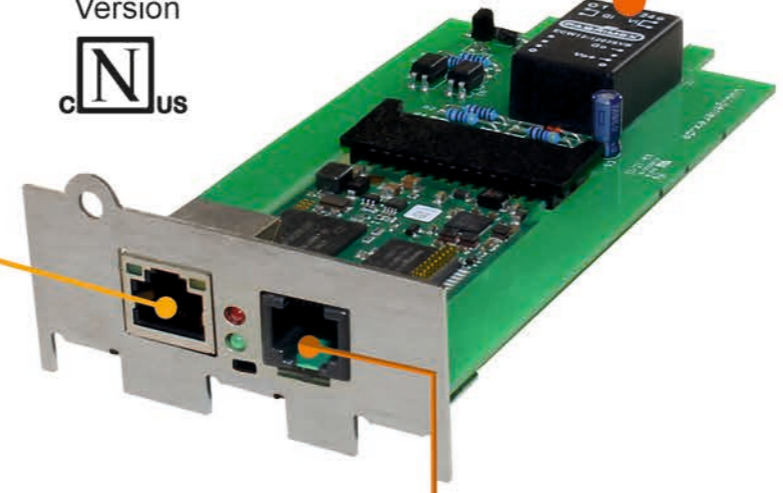

LAN

COM1

RS232

AROS/RIELLO UPS with NETMAN Slot



COM2 - COM3 Combi Port

Depending on connected devices: Adapter and/or splitter required



„SPSMRJ_1“

Facility Management Extension Options

- Pipe-Through RS-232
- MODBUS RS232
- SENSORMANAGER „SENSMC121“
- Temperature Sensor „SMTCOMMR“
- Temperature and Humidity Combi Sensor „SMTHCOMMR“
- PROFIBUS „SPI_2_MR“
- PROFINET „PROF_MR“
- LONbus „LON_MR“
- GSM / LTE / 4G Modem „4G-T61MR“

Setup for dry contact and add-ons

- AS400 Adapter „AS400AUX4“
- Alarm Buzzer „CS141_BUZ“
- Relay Board „CON_R_AUX4“
- Connection Terminal „CON_AUX4“
- **BACS - Battery Management System**



■ BACS BUS Interface „GX_R_AUX“